




BC2406 Pallet Dolly

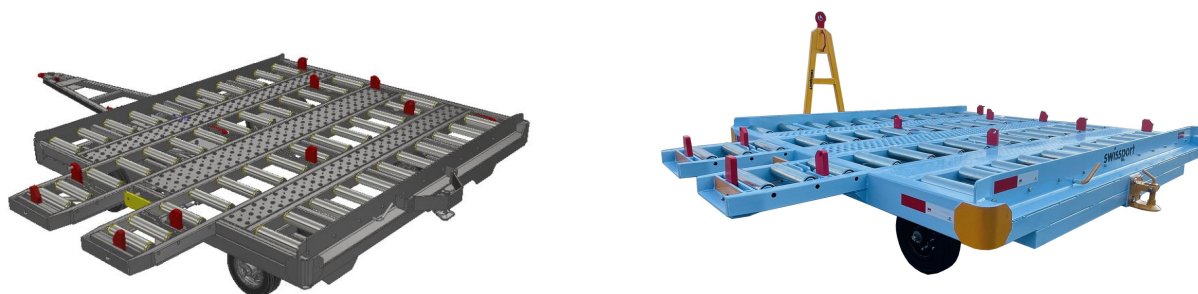

Suitable for loading and unloading P1,P6,P7,P9 pallets and LD1, LD2,LD3,LD4,LD6,LD7 containers.

Dimensions

Loading design	narrowside	Wheel base	1580mm
Overall length	4735mm	Wheel gauge -front	1700mm
Overall width	3463mm	Wheel gauge -rear	1800mm
Overall height	580mm	Tire Type-front	15*4½-8
Tow bar	1600mm	Tire Type-rear	15*4½-8
Working surface size	3463*2700mm	Quantity of tires	8
Working surface	520mm	Max speed	32km/h
Weight	1340kg	Min turning radius	≤6500mm
Loading capacity	7000kg	Roller external diameter	Φ89mm

Specification

Options

Steering	Turntable type	-
Loading	Narrow side loading	-
Anti-collision	Anti-collision function is designed under the tow bar	-
Rollers	All galvanized, designed by 4 rows and 50 rollers	-
Stoppers	(A) Automatic restraint lock * 2 pieces (B) Manual restraint lock * 9pieces	-
Brake	Activated when the tow bar is lifted and lowered	-
Hitch	Patented SUPU spring loaded hitch	Automatic Hitch
Finish	Sandblasted and painted	Hot-galvanized